



Washer extractor

QuickWash

Features and benefits

- Control knob for simple program selection and start
- Large, clear display
- **AS – Automatic Savings:**
 - The machine weighs the linen and adjusts the amount of water and energy according to the load. This leads to considerable savings in case the machine is not fully loaded
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Panels and frame made from galvanized steel
- Inner and outer drums made from stainless steel
- Powder coated black front panel, side panels and top cover
- Strong door and hinges. Easy-grip, ergonomic door handle which makes the door easy to open and close
- Drain pump
- Frequency-controlled motor with no carbon or brushes
- Door seal in the door, does not wear when the machine is loaded and unloaded



Images shown are a representation of the product only and variations may occur.

Main options

- Stacking kit to install tumble dryer QuickDry on top to save space
- Plinths for raising the machine to a comfortable height (height 100 mm when installed with a tumble dryer, or 290 mm)
- Connecting hoses

Main specifications			QuickWash	
Max. capacity		kg	5.5	
Drum,	volume	litre	53	
	diameter	ø mm	452	
Extraction		rpm	1300	
G-factor			425	
Heating alternatives, electricity		kW	4.4 / 2.8	
Consumption data "Normal 60°C" *				
Total time		min	44 / 56 / 50	
Water consumption		litre	58	
Energy consumption (motor/heating)		kWh	0.15/0.80	
* Water temperature 15°C cold water.				



Electrical connections

Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-230V 1~	50/60	2.1	2.5	16
	220-230V 1~	50/60	4.2	4.7	25
	240V 1~	50/60	2.8	3.2	13
	240V 1~	50/60	2.2	2.6	16
	380-400V 3 ~	50/60	4.2	4.7	10
	415V 3 ~	50/60	4.4	4.8	10

Water connections

Water valves	DN	20
Water pressure	kPa	200-500
Capacity at 300 kPa	l/min	17
Draining capacity	l/min	25
Max. draining	l	20

Floor requirements

Frequency of the dynamic force	Hz	20
Floor load at max extraction	kN	1.02 ± 0.3

Sound levels

Sound power level (IEC 60704-2-4)		
wash	dB(A)	59
extraction	dB(A)	72

Heat emission

% of installed power, max		5
---------------------------	--	---

Shipping data

Shipping volume	net, kg	99
	crated, kg	109
	m ³	0.47

Accessories


Stacking kit with QuickDry		x
Stainless base, 290 mm, and galvanised base for stacking installation, 100 mm		x

Dimensions in mm


A Width	595
B Depth	680
C Height	850
D	305
E	660
F	80
G	60
H	90
I	80
K	650 ± 50

- 1 Control panel
- 2 Soap box
- 3 Door opening ø 255 mm
- 4 Cold water
- 5 Drain, pump
- 6 Electrical connection


* Other voltages available, see installation manual

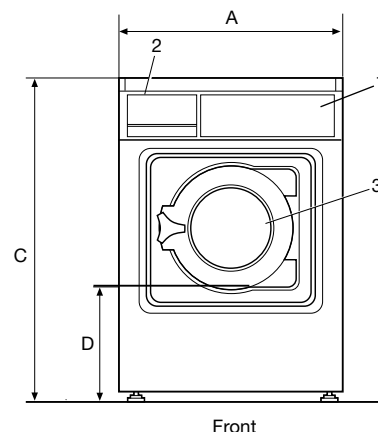

Front

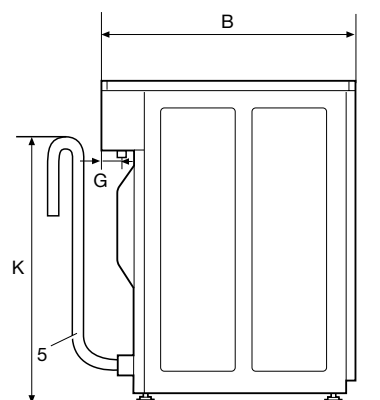

Side view, pump

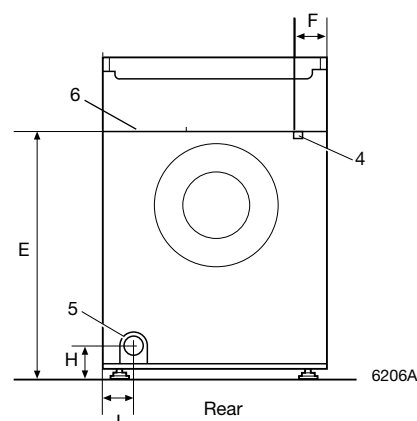

Rear