



# Washer extractor

## W5130N

### Features and benefits

- **Compass Pro® microprocessor offers:**
  - Large display and one control knob for easy program selection
  - Language selection
  - Quick selection and option buttons for the most frequently used wash programs and options
  - Wash program packages optimized on *Economy, Performance and Time*. (Available on general programs)
- Extremely low water and energy consumption – see table below
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance guarantees the correct extraction force

### Main options

- Automatic liquid detergent supply (optional I/O board)
- Stainless steel front panel
- Connection to booking- /payment- system or coin meter
- Drain pump



Images shown are a representation of the product only and variations may occur.

| Main specifications                   |                    |       |  | W5130N           |                 |                  |                 |
|---------------------------------------|--------------------|-------|--|------------------|-----------------|------------------|-----------------|
| Max. capacity                         | filling factor 1:9 | kg/lb |  | 14/30            |                 |                  |                 |
| Drum,                                 | volume             | litre |  | 130              |                 |                  |                 |
|                                       | diameter           | ø mm  |  | 595              |                 |                  |                 |
| Extraction                            |                    | rpm   |  | 548              |                 |                  |                 |
| G-factor                              |                    |       |  | 100              |                 |                  |                 |
| Standard heating alternatives         | electricity        | kW    |  | 7.5 / 10.0       |                 |                  |                 |
| Low energy heating alternatives       | electricity        | kW    |  | 3.0              |                 |                  |                 |
|                                       | steam              |       |  | x                |                 |                  |                 |
|                                       | non-heated         |       |  | x                |                 |                  |                 |
| <b>Consumption data "Normal 60°C"</b> |                    |       |  | EI               |                 | Steam**          |                 |
| <b>Economy*</b>                       |                    |       |  | Full load, 14 kg | Half load, 7 kg | Full load, 14 kg | Half load, 7 kg |
| Total time                            | min                |       |  | 47               | 45              | 47               | 45              |
| Water consumption (cold+hot)          | litre              |       |  | 87+23            | 64+15           | 87+23            | 64+15           |
| Energy consumption (motor/heating***) | kWh                |       |  | 0.15/2.1         | 0.15/1.45       | 0.15/-           | 0.15/-          |
| Steam consumption                     | kg                 |       |  | -                | -               | 3.15             | 2.2             |
| Residual moisture                     | %                  |       |  | 69               | 78              | 69               | 78              |

\* Water temperature 15°C cold water and 65°C hot water.

\*\* Depending on steam pressure.

\*\*\* Includes hot water heating.



Thinking of you  
**Electrolux**


### Electrical connections

| Heating alternative | Main voltage   | Hz    | Heating power kW | Total power kW | Recommended fuse A |
|---------------------|----------------|-------|------------------|----------------|--------------------|
| Electric heated     | 220-240V 1 ~   | 50/60 | 3.0/7.5/10.0     | 3.5/8.0/10.4   | 20/35/50           |
|                     | 220-240V 3 ~   | 50/60 | 7.5/10.0         | 8.0/10.4       | 25/35              |
|                     | 380-415V 3N ~  | 50/60 | 7.5/10.0         | 7.9/10.4       | 16/20              |
|                     | 440V 3 ~       | 60    | 7.5/10.0         | 8.0/10.4       | 16/20              |
|                     | 480V 3 ~       | 60    | 7.5/10.0         | 8.0/10.4       | 16                 |
| Steam or Non heated | 220-480V 1/3 ~ | 50/60 | -                | 1.0            | 10                 |


| Water and steam connection        |                           | W5130N    |
|-----------------------------------|---------------------------|-----------|
| Water valves                      | DN                        | 20        |
| Water pressure                    | kPa                       | 200-600   |
| Capacity at 300 kPa               | l/min                     | 20        |
| Drain valve                       | ø mm                      | 75        |
| Draining capacity                 | l/min                     | 170       |
| Steam valve                       | DN                        | 15        |
| Steam pressure                    | kPa                       | 300-600   |
| Liquid detergent supplies         |                           | 5         |
| Floor requirements                |                           |           |
| Frequency of the dynamic force    | Hz                        | 9.1       |
| Floor load at max extraction      | kN                        | 2.4 ± 3.1 |
| Sound levels                      |                           |           |
| Sound power level (IEC 60704-2-4) |                           |           |
| wash                              | dB(A)                     | 64        |
| extraction                        | dB(A)                     | 69        |
| Heat emission                     |                           |           |
| % of installed power, max         |                           | 5         |
| Shipping data                     |                           |           |
| Weight                            | net, kg                   | 175       |
|                                   | crated, kg                | 196       |
| Shipping volume                   | m³                        | 0.91      |
| Accessories                       |                           |           |
| Steel base                        |                           | x         |
| Hose kits for water or steam      |                           | x         |
| Fluff collector                   |                           | x         |
| Dimensions in mm                  |                           |           |
| A Width                           |                           | 720       |
| B Depth                           |                           | 790       |
| C Height                          |                           | 1200      |
| D                                 |                           | 365       |
| E                                 |                           | 825       |
| F                                 |                           | 910       |
| G                                 |                           | 45        |
| H                                 |                           | 1115      |
| I                                 |                           | 215       |
| J                                 |                           | 130       |
| K                                 |                           | 1095      |
| L                                 |                           | 910       |
| M                                 |                           | 420       |
| N                                 |                           | 100       |
| O                                 |                           | 235       |
| 1 Operating panel                 | 6 Water re-use            |           |
| 2 Door opening ø 365 mm           | 7 Drain                   |           |
| 3 Detergent box                   | 8 Liquid detergent supply |           |
| 4 Cold water                      | 9 Electrical connection   |           |
| 5 Hot water                       | 10 Steam connection       |           |

Front and side panels in light grey and blue (RAL 260 70 05, 250 60 30)


\* Other voltages available, see installation manual

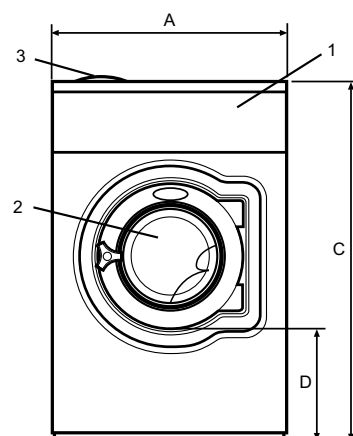

Front

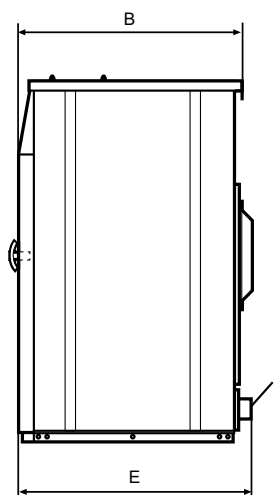

Side view

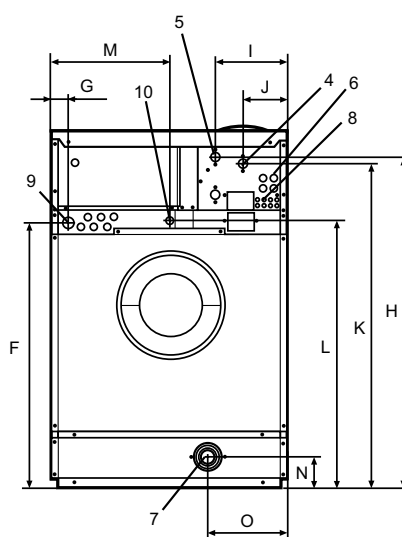

Rear