

Tumble dryer

T5300S

Features and benefits

- High productivity –2 full loads per hour per pocket
- Low energy consumption for optimal efficiency and economy
- Selection of temperature and time for easy operation
- Customized user panels for specific user needs – available for Coin and OPL (On Premises Laundry)
- Large door opening for easy loading and unloading
- Easy access to vital parts from front and rear for simple servicing
- With Compass Pro program control
 - Large and clear display for easy program selection
 - Easy access with user-friendly interface
 - Language selection
 - Service program for adjustment of parameters
 - USB connection
- Serviceprogram for adjustment of parameters eg. temperature and cool-down time
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption

Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control – RMC
- Reversing drum
- Payment: coinmeter with Ecopower, chipcard reader, central payment connection



Images shown are a representation of the product only and variations may occur.

Main specifications**			T5300S			
Rated capacity, filling factor 1:18	kg/lb		16.7/37			
filling factor 1:25	kg/lb		12/26			
Drum volume	litre		300			
Drum diameter	mm		760			
Heating						
gas	BTU/h (kW)		71 700 (21)			
el	kW		9/13.5/18			
Consumption data*			Gas	EI 9 kW	EI 13.5 kW	EI 18 kW
Total time at 13.6 kg	min		21	43	29	24
Energy consumption at 13.6 kg	kWh		7.11	6.65	6.51	6.51
Evaporation	g/min		329	160	231	279
Energy kWh/litre water evaporated	kWh/l		1.03	0.96	0.97	0.97

* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.

** Value per pocket



Thinking of you
Electrolux

Electrical connections

Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-240V3 ~	50/60	9.0	10.0	35
	380-415V3 ~	50		9.0/13.5/18.0	10.0/14.5/19.0
Gas heated	440-480V3 ~	16/25/35	9.0	10.0/13.5/18.0	10.0/14.5/19.0
		60			
	120V1 ~	60	-	1.0	15
	208-240V 1 ~	60	-	1.0	15
	200V3 ~	50/60	-	1.0	10

Gas and air connections

Gas and air connections			T5300S
Gas		ISO 7/1-R	1/2"
Gas pressure	Natural gas	Pa	2000
		mbar	20
Propane		Pa	2800-5000
		mbar	28-50
Air outlet		Ø mm	200
Evacuated air, gas/el		m³/h	600
Pressure drop, gas/el		Max. Pa	400

Sound levels

Airborne sound level	
dB(A)	<70

Heat emission

% of installed power, max	15
---------------------------	----





Shipping data

	net, kg	295
	crated, kg	315
	crated, m³	2.0

Dimensions in mm

A Width	790
B Depth	1115
C Height	1940
D	1270
E	1210
F	320
G	260
H	905
I	140
J	1930
K	30
L	105
M	1840
N	740
O	210

- 1 Operating panel
- 2 Door opening Ø 580 mm
- 3 Electric connection
- 4 Gas connection
- 5 Exhaust connection

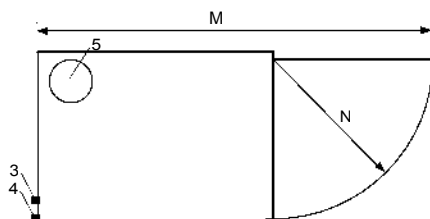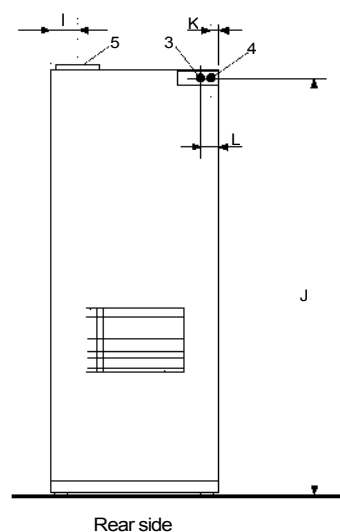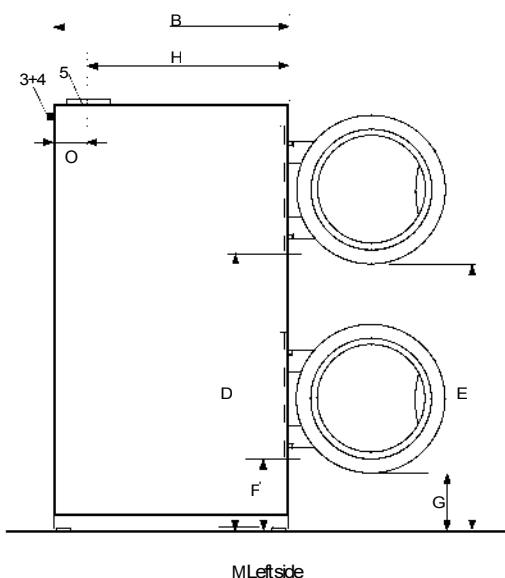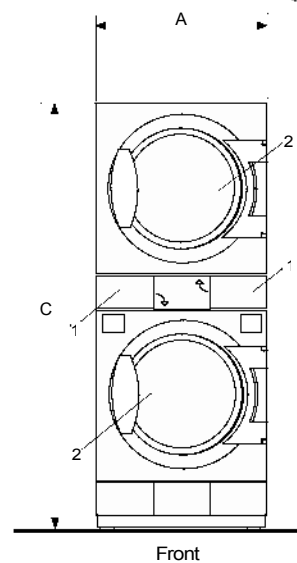

* Other voltages available, see installation manual.

www.electrolux.com/laundrysystems

Share more of our thinking at www.electrolux.com